


LIMIT STATES DESIGN

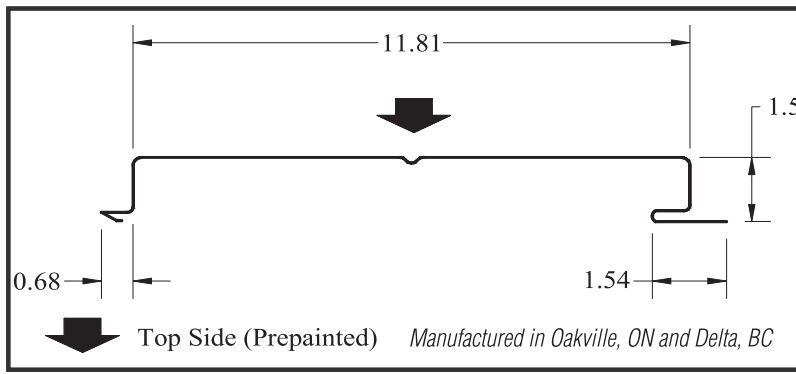

CLADDING
AD300R
AD300SR

Imperial

AD300R as shown above, may be produced in base steel nominal thickness of 0.030", 0.036" and 0.048".
AD300SR without minor rib, may be produced in base steel nominal thickness of 0.030", 0.036" and 0.048".

Note

- Properties and loads are based on Grade 33 Steel with a minimum yield stress of 33,000 psi, and a maximum stress under Factored loads of 29,700 psi.
- Figures in Row B indicate the load capacity based on strength. Strength capacity B should be checked against [Specified Live Load]+[0.833 x Specified Dead Load].
- Where cladding is subjected only to wind load, strength values may be increased by 7%.
- Figures in row D indicate the load capacity based on deflection of 1/180th span. For allowable deflection of 1/90th span, values in Row D can be doubled, but must not exceed the value in Row B. Deflection capacity should be checked against specified Load(s).
- An * indicates capacity has been reduced to account for web crippling.

Base Steel Nominal Thickness (inches)	Nominal Thickness Z275 Coating (inches)	Mass with Coating (lb/ft ²)	Section Modulus		Moment of Inertia (inches ⁴)	Factored Resistance			
			Midspan (inches ³)	Support (inches ³)		Moment (lb-in)		Reaction (pounds)	
						Midspan (lb-in)	Support (lb-in)	Exterior (pounds)	Interior (pounds)
0.018	0.020	----	----	----	----	----	----	----	----
0.024	0.026	----	----	----	----	----	----	----	----
0.030	0.032	1.915	0.0965	0.1267	0.0930	2866.1	3763.0	404	569
0.036	0.038	2.275	0.1289	0.1516	0.1199	3828.3	4502.5	562	809
0.048	0.050	2.992	0.2032	0.2001	0.1902	6035.0	5943.0	946	1391

PHYSICAL PROPERTIES

(PER FOOT WIDTH) In accordance with CSA Specification S136-07

LOAD TABLE

Maximum Specified Uniformly Distributed Load in lb/ft² (psf)

Support Spacing		1-Span Base Steel Nominal Thickness (inches)					2-Span Base Steel Nominal Thickness (inches)					3-Span Base Steel Nominal Thickness (inches)				
		0.018	0.024	0.030	0.036	0.048	0.018	0.024	0.030	0.036	0.048	0.018	0.024	0.030	0.036	0.048
		4' - 0"	B			80	106	168			76*	108*	165			86*
	D			127	164	260			305	393	623			240	309	491
4' - 6"	B			63	84	132			67*	96*	130			77*	109*	163
	D			89	115	182			214	276	438			169	217	345
5' - 0"	B			51	68	107			61*	80	106			69*	98*	132
	D			65	84	133			156	201	319			123	158	251
5' - 6"	B			42	56	89			55*	66	87			63*	83	109
	D			49	63	100			117	151	240			92	119	189
6' - 0"	B			35	47	75			46	56	73			55	69	92
	D			38	49	77			90	116	185			71	92	145
6' - 6"	B			30	40	63			40	47	63			47	59	78
	D			30	38	61			71	92	145			56	72	114
7' - 0"	B			26	35	55			34	41	54			41	51	67
	D			24	31	48			57	73	116			45	58	92
7' - 6"	B			23	30	48			30	36	47			35	44	59
	D			19	25	39			46	60	95			36	47	74
8' - 0"	B				27	42			26	31	41			31	39	52
	D				20	32			38	49	78			30	39	61
8' - 6"	B				24	37			23	28	37			28	35	46
	D				17	27			32	41	65			25	32	51
9' - 0"	B				21	33			21	25	33			25	31	41
	D				14	23			27	35	55			21	27	43

In accordance with ongoing efforts to improve our products and their performance, Vicwest reserves the right to change without notice the specifications contained herein.

The contents herein are for general information and illustrative purposes only and are not intended to serve as any type of advice. Every effort is made to ensure the accuracy of the information included in this brochure and it is believed that the information contained herein is accurate and reliable as of the date of publication. Vicwest, however, does not warrant or represent the accuracy or reliability of any information included in this brochure. Any reliance on any information without consultation with Vicwest or a duly authorized representative shall be at the user's own risk. ©2010, Vicwest - All rights reserved



VW00153EN01/11