
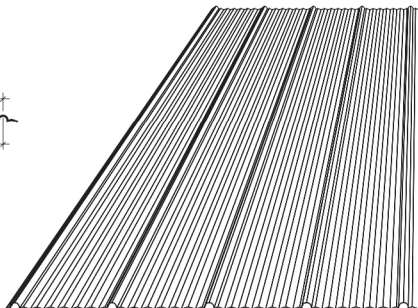


BARNMASTER

Manufactured in Stratford



FINISH	MATERIAL GAUGE						LENGTH
	30	28	26	24	22	20	
GALVALUME	•	•	•				4' - 30'
GALVANIZED	•	•	•				4' - 30'
PREPAINTED	•	•	•				4' - 30'

APPLICATION - walls and roofing

STEEL:

- galvanized and Galvalume
- prepainted galvanized WeatherX™ series (see VICWEST standard colours).

MATERIAL SPECIFICATIONS:

The steel used in the manufacture of BARNMASTER sheet meets the following specifications:

ASTM A792 Gr. 33 (latest revision) with designation AZ150

- for Galvalume material.

ASTM A653 SQ, Gr. 33 (latest revision) with designation Z275

- for Galvanized material.

ASTM A653 SQ, Gr. 33 (latest revision) with designation AZ150 or Z275

- for Prepainted Galvanized and Galvalume material.



Five main nailing ribs 1/2" (13mm) high, make BARNMASTER sheets compatible with most 5-rib, 32" coverage sheets on the market.

The versatile BARNMASTER profile can be used either as sidewall or roofing cladding, making BARNMASTER the perfect sheet to stock in 6, 8, 10, 12 and 14 foot lengths.

BARNMASTER can be used as a roofing profile for pitches down to 4/12.

BARNMASTER is a fully reversible profile.