


Wall Only

CL 7015-R



CL 815-R

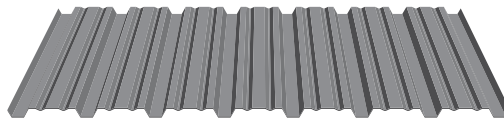

CL 7015-R CL 815-R

Manufactured in Victoriaville, PQ




Recommended Overlap Procedure




Recommended Overlap Procedure

CL 7015-R

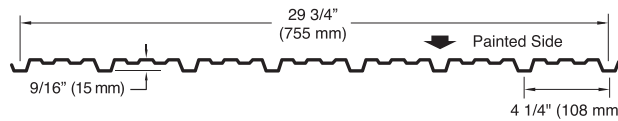

CL 815-R

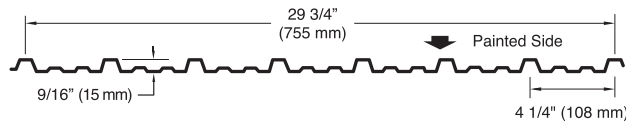

FINISH	MATERIAL GAUGE					LENGTH
	30	28	26	24	22	
GALVALUME	•	•	•	•	•	4' to 30'
GALVANIZED	•	•	•	•	•	4' to 30'
PRE-PAINTED	•	•	•	•	•	4' to 30'

*R - With intermediate ribs

SR - Without intermediate ribs, available in 24 and 22 ga. only.

STEEL:

- Galvanized and Galvalume
- Prepainted Galvanized WeatherX™ series (see Vicwest standard colors).



MATERIAL SPECIFICATIONS:

The steel used to manufacture VIC 7015-R OR VIC 815-R sheet meets the following specifications:

- ASTM A792 Grade 33 (latest revision) with designation AZ50 (AZM150) for Galvalume material.
- ASTM A653 SQ, Grade 33 (latest revision) with designation G90 (Z275) for Galvanized material.
- ASTM A653 SQ, Grade 33 (latest revision) with designation AZ50 or Z275 for prepainted Galvanized and Galvalume material.

7015-R and 815-R profiles were designed specifically with appearance and durability in mind. Their distinctive form will give a certain added touch to your projects.

Especially created for wall applications, these panels are versatile enough to be installed horizontally, vertically or diagonally.

The 7015-R profile has a unique rib design which permits you to use all types of fasteners; e.g., the metal head screw with washer or the highly recommended nylon head screw.

